



TIRUPATITM
INTERNATIONAL



www.tpaper.in

Dye Sublimation Printer

WIDER WIDTH DYE SUBLIMATION PRINTER

(8 HEADS)

Model: TX 08 - 3.2



Sublimation Ink



Eight I3200 Heads
CMYK



*2.6m Eight i3200 Print Heads Speed

360x1200dpi - 1pass 373 m²/h

360x2400dpi - 2pass 214 m²/h

360x3600dpi - 3pass 143 m²/h


*3.2m Eight i3200 Print Heads Speed

360x1200dpi - 1pass 420 m²/h

360x2400dpi - 2pass 234 m²/h


360x3600dpi - 3pass 160 m²/h

Both the sublimation and direct-to-textile printers are examples of our expertise and engineering: top performant, reliable and precise. With the TIRUPATI series printer, you can maximize productivity while controlling quality and minimizing cost for beautiful soft signage, apparel, and interior decor items that will set your business apart from the competition. Wide application in clothing, home decoration fabric, samplings, shirts canvas bags, bolster scooter, flags, textile gadgets, etc.

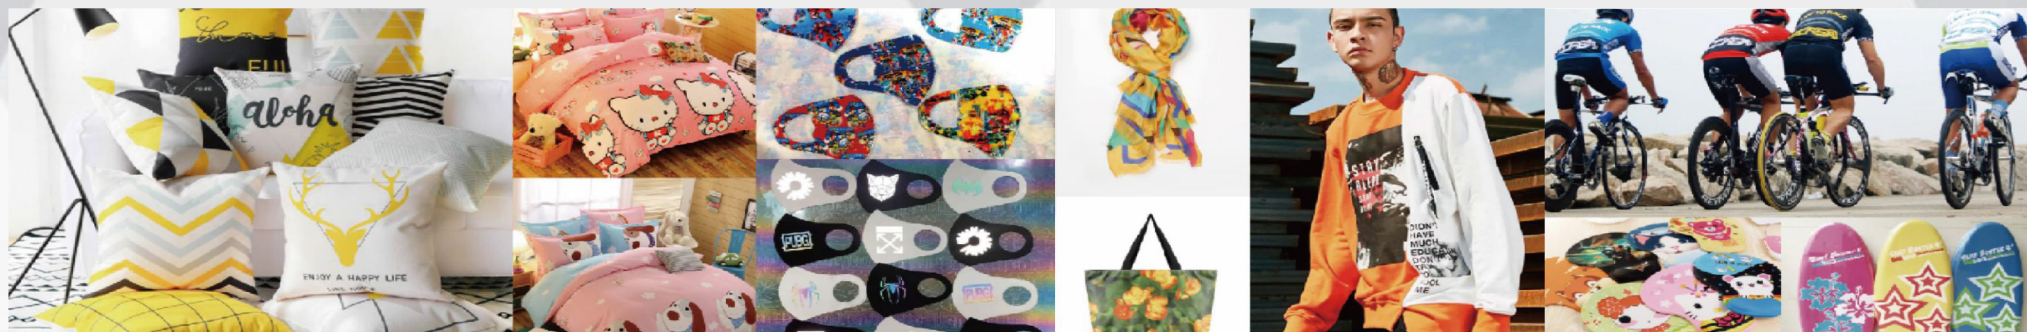

● Technical Specification


Model	TX08-3.2		
Print Head	08*3200 Print Heads		
Printing Technology	Piezoelectric Inkjet		
Acceptable Media	Width Thickness Maximum Media Load	103.5 in.(2630 mm) Maximum 39 Mil(1 mm) 3000m	127 in (3230 mm)
Printing Width	102 in.(2600 mm)		126 in (3200 mm)
Ink Cartridges	Type Capacity Color	Dye Sublimation Ink 4*4 CISS (220ml ink cartridge with 5L Ink tank) 4 colors (Cyan, Magenta, Yellow, Black)	
Printing Resolution	Maximum 3600 dpi		
Printing Speed	1pass(360x1200dpi):373 sqm/h 2pass(360x2400dpi):214 sqm/h 3pass(360x3600dpi):143 sqm/h		1pass(360x1200dpi):420 sqm/h 2pass(360x2400dpi):234 sqm/h 3pass(360x3600dpi):160 sqm/h
Media Heating System	Intergrated post heater & Infrared Dryer & Fan system		
Interface	USB 3.0		
Power Supply	AC 220V ± 10%, 50/60 HZ		
Dimensions (with stand)	165.35(W)x51.18(D)x78.74(H) in (4200(W)x1300(D)x2000(H) mm)		179.53(W)x57.09(D)x82.68(H) in (4560(W)x1450(D)x2100(H) mm)
Weight(with stand)	1940 lb. (880 kg)		2205 lb. (1000 kg)
Package Dimensions	173.22(W)x55.12(D)x82.68(H) in (4400(W)x1400(D)x2100(H) mm)		187.40(W)x61.02(D)x86.61(H) in (4760(W)x1550(D)x2200(H) mm)
Package Weight	2161 lb. (980 kg)		2225 lb. (1100 kg)
Environment	Power on Power off	Temperature: 59 °F to 90 °F [15°C to 32°C] / Humidity: 35 to 80% (no condensation) Temperature: 41 °F to 104 °F [5°C to 40°C] / Humidity: 20 to 80% (no condensation)	
Accessories	USB cable, media clamp, manual, drain bottle, ink cartridges, RIP software, etc.		



Double high-precision mute rail



Front expander




Media retraction tension bar



Inflatable take up and feed media shaft



Stable 5L bulk system ensures amazing printing speed



Rear media balance bar



Junbo media roll maximum 1000m media load



Frequency motor ensures more stable material loading and take-up

CONTACT US

+91 82384 33322

+91 99788 00900

+91 75738 33322

+91 99788 12212

✉ sublimationtpaper@gmail.com